


5029 SERIES BALERS



KEY FEATURES

<u>HOPPER OPENINGS:</u>	44" X 29" OR 49.5" X 27.5"
<u>RAM FORCE PRESSURE:</u>	UP TO 193 PSI
<u>CYCLE TIME IN SECONDS:</u>	AS FAST AS 7.0 (NO LOAD)
<u>MAXIMUM WEIGHT OF BALER:</u>	37,250#

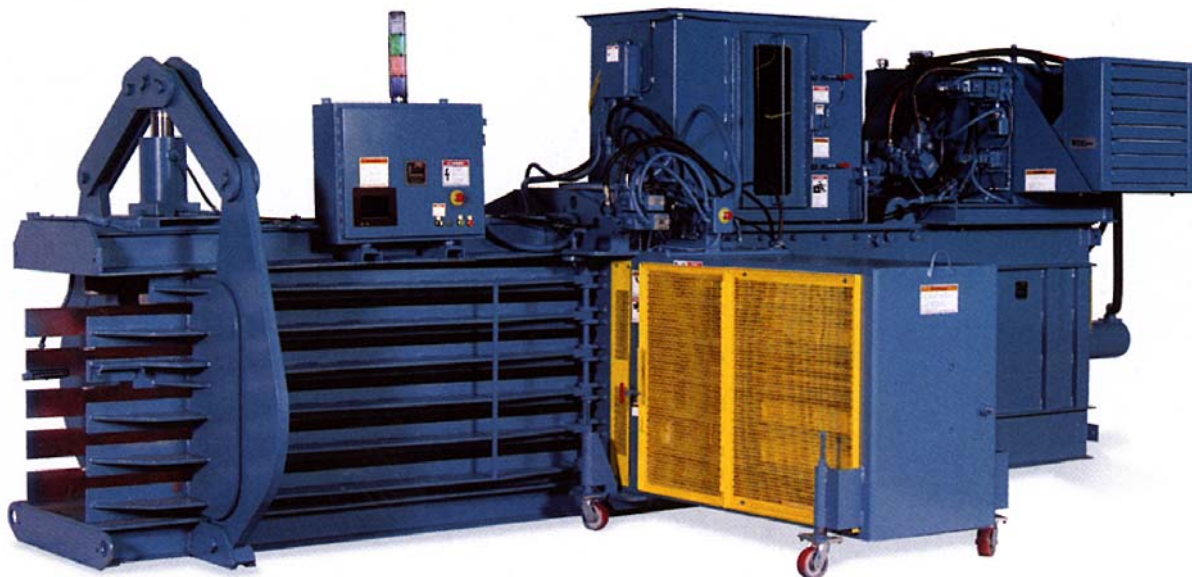

AMERICAN BALER COMPANY

PH: 419.483.5790


BELLEVUE, OHIO

EMAIL: sales@americanbaler.com WEB: www.americanbaler.com


SPECIFICATIONS 5029 SERIES BALERS



Slick material tension chamber control self-adjusts to different material.

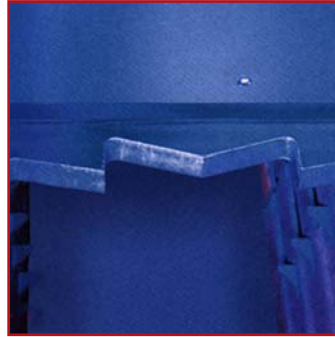

Multi-level, replaceable shear often eliminates the need for pre-shredding (5029NS only).

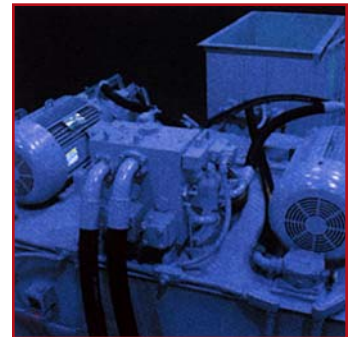

Dual motor power packs produce high displacement and provide redundant motor and pump support.



“Pathfinder” Touch Screen control panel uses graphics to guide operators through all baler functions.



Eight spring-loaded retainer locks restrict bale spring back.

SPECIFICATIONS

	5029NN	5029NS
	Non-Shear	Shear
Feed Opening	49.5" x 27.5"	49.5" x 27.5"
Charge Box Volume	43 cf	43 cf
Horsepower	20 / 30 / Twin 20 / Twin 30 / Twin 50 / Twin 75	
Displacement (Dry)	Min. - 5915 CF / Max. - 22,050 CF	
Main Cylinder	9" / 10"	8" / 9" / 10"
Compressing Force	190,850 / 235,620 #	150,795 / 190,850 / 235,620#
Ram Face Pressure	156 PSI - 193 PSI	124 PSI - 193 PSI
Bale Size	30" w x 43" h x variable length (min. 20", max. 80")	

OTHER FEATURES:

“Pathfinder” Color Touch Screen guides operators through process setup, system monitoring, trouble shooting and product changeovers.

Five-wire swing away auto-tier, powered by the baler’s hydraulics, requires no additional electric motor drive system.

“Sharp 5X” replaceable floor liners with 10,000 hours or 5-year warranty.

Slick material tension system automatically adjusts to the coefficient of friction of the material being baled.

Optional redundant power packs can operate in intermittent mode to reduce utility usage during low production times.

Optional fluffer eliminates the high cost of shredding.

Built to all current ANSI and OSHA standards. 24-hour telephone hotline for service and technical support.

American Baler, in an effort to keep the product “efficient and up to date”, reserves the right to modify these specifications without notice or liability to previously sold machines.